


# Hazardous Area Guide for ATEX & IECEx

**Please note: Equipment manufacturers and distributors are not ATEX consultants, cannot play any role in the process of determining the risk of explosion and cannot therefore specify the ATEX 2014/34/EU code for any product supplied.**

## Typical Equipment Marking for Gas Atmospheres



## Typical Equipment Marking for Dust Atmospheres

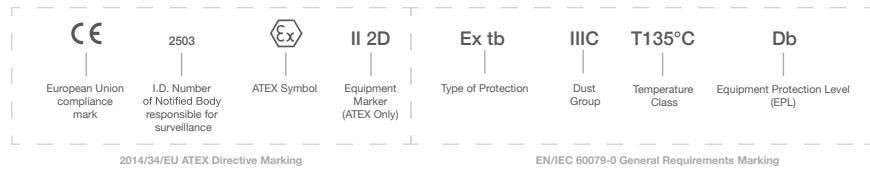

## Gas Zones

Gas Zones	Definition	ATEX Category	EPL	Required Protection
Methane	Mines with methane and dust. Equipment remains energised in explosive atmosphere	M1	Ma	Two Faults
Methane	Mines with methane and dust. Equipment is de-energised in explosive atmosphere	M2	Mb	Severe Normal Operation
Zone 0	Explosive atmosphere present continuously or for long periods, frequently	1G	Ga	Two Faults
Zone 1	Explosive atmosphere is likely to occur under normal conditions, occasionally	2G	Gb	One Fault
Zone 2	Explosive atmosphere is unlikely to occur under normal conditions, short periods	3G	Gc	Normal Operation

## Dust Zones

Dust Zones	Definition	ATEX Category	EPL	Required Protection
Zone 20	Explosive atmosphere present continuously or for long periods, frequently	1D	Da	Two Faults
Zone 21	Explosive atmosphere is likely to occur under normal conditions, occasionally	2D	Db	One Fault
Zone 22	Explosive atmosphere is unlikely to occur under normal conditions, short periods	3D	Dc	Normal Operation


**Suitable for Zone 0, 1 & 2**  
ATEX Group & Category: II 1G  
IECEx Equipment Protection Level: Ga  
Types of protection (electrical): la, da, ma, op is  
Types of protection (non-electrical, ATEX): c, b, k  
Types of protection (non-electrical, IECEx): h

**Suitable for Zone 1 & 2**  
ATEX Group & Category: II 2G  
IECEx Equipment Protection Level: Gb  
Types of protection (electrical): db, eb, ib, mb, ob, pxb, pyb, qb, op is, op pr, op sh  
Types of protection (non-electrical, ATEX): d, c, b, p, k, h  
Types of protection (non-electrical, IECEx): d, p, h

**Suitable for Zone 2 only**  
ATEX Group & Category: II 3G  
IECEx Equipment Protection Level: Gc  
Types of protection (electrical): dc, ec, ic, mc, nA, nC, nR, oc, pzc, qc  
Types of protection (non-electrical, ATEX): fr, d, c, b, p, k, h  
Types of protection (non-electrical, IECEx): fr, d, p, h

## Zones of Use

Explosive Atmospheres



## Suitable for Zone 20, 21 & 22:

ATEX Group & Category: II 1D  
IECEx Equipment Protection Level: Da  
Types of protection (electrical): ta, ia  
Types of protection (non-electrical, ATEX): c, b, k, h  
Types of protection (non-electrical, IECEx): fr, d, p, h

**Suitable for Zone 1 & 22:**  
ATEX Group & Category: II 2D  
IECEx Equipment Protection Level: Db  
Types of protection (electrical): tb, ib, mb  
Types of protection (non-electrical, ATEX): d, c, b, p, k, h  
Types of protection (non-electrical, IECEx): d, h

**Suitable for Zone 2 only:**  
ATEX Group & Category: II 3D  
IECEx Equipment Protection Level: Dc  
Types of protection (electrical): tc, ic, mc  
Types of protection (non-electrical, ATEX): fr, d, c, b, p, k, h  
Types of protection (non-electrical, IECEx): h



## Protection Concept - Electrical - Gas

Type of Protection (electrical - gas)	Reference
General Requirements	EN/IEC 60079-0
Flameproof - Ex d / da / db / dc	EN/IEC 60079-1
Purge/Pressurised - Ex p / pxb / pyb / pzc	IEC 60079-2
Quartz/Sand Filled - Ex q / qb / qc	EN/IEC 60079-5
Oil Immersion - Ex o / ob / oc	EN/IEC 60079-6
Increased Safety - Ex e / eb / ec	EN/IEC 60079-7
Intrinsic Safety - Ex i / ia / ib / ic	EN/IEC 60079-11
Non Sparking - Ex nA / nC / nL	EN/IEC 60079-15
Encapsulation - Ex m / ma / mb / mc	EN/IEC 60079-18
Optical Radiation - Ex op / op sh / op pr	EN/IEC 60079-28
Trace Heating Systems - Ex e / Ex 60079-30-1	EN/IEC 60079-30-1
Special Protection Ex s	EN/IEC 60079-33
Caplights	EN/IEC 60079-35-1
Controlled Spark Duration Power-i	TS 60079-39
Process Sealing	TS 60079-40
Flame Arresters	EN 16852
Diesel Engines	EN 1834-1,2,3

## Protection Concept - Electrical - Dust

Type of Protection (electrical - dust)	Reference
General Requirements	EN/IEC 60079-0
Enclosure - ta / tb / tc	EN/IEC 60079-31
Purge/Pressurised - Ex p / pxb / pyb / pzc	EN/IEC 60079-2
Intrinsic Safety - Ex i / ia / ib / ic	EN/IEC 60079-11
Encapsulation - Ex m / ma / mb / mc	EN/IEC 60079-18

## Protection Concept - Non Electrical

Type of Protection (non-electrical) (gas & dust)	Reference (ATEX only)	IECEx
General Requirements	EN 80079-36	IEC / ISO 80079-36
Flow Restricting Enclosure - fr	EN 13463-2	-
Flameproof - d	EN 13463-3	-
Constructional Safety - c / h	EN 80079-37	IEC / ISO 80079-37
Control of Ignition - b / h	EN 80079-37	IEC / ISO 80079-37
Pressurisation - p	EN 80079-2	-
Liquid Immersion - k / h	EN 80079-37	IEC / ISO 80079-37

## Gas Groups

Gas Groups	Gases are classified according to the ignitability of the gas/air mixture as defined in EN/IEC 60079-20-21
IIA	Acetic Acid, Acetone, Ammonia, Butane, Cyclohexane, Propane, Gasoline (petrol), Methane (natural gas, non-mining), Toluene, Xylene, Methanol (methyl alcohol), Propane-2-ol (iso-propyl alcohol)
IIIB	Group II A gases plus, Di-ethyl ether, Ethylene, Ethanol Methyl Ethyl Ketone (MEK), Propane-1-ol (n-propyl alcohol)
IIC	Group II A and II B gases plus, Acetylene, Hydrogen

## Dust Groups

Dust Groups	Dusts are classified by the types of material that make up the dust
IIIA	Combustible Fibres and Flyings
IIIB	Group IIIA dusts plus, Non-Conductive Dusts
IIIC	Group IIIA and IIIB dusts plus, Conductive Dusts

## Equipment Group

Equipment Group	Definition
Group I	Electrical equipment intended for use in mines susceptible to fire damp
Group II	Electrical equipment intended for use in explosive gas atmospheres
Group III	Electrical equipment intended for use in explosive dust atmospheres

## Temperature Class (T Class)

Temperature Class (T Class)	Highest temperature achieved under the most adverse equipment rating and heating conditions. (Flashpoint temperature of some gases)
T1: 450°C	Ammonia (630°C), Hydrogen (560°C), Methane (537°C), Propane (470°C)
T2: 300°C	Ethyline (425°C), Butane (372°C), Acetylene (305°C)
T3: 200°C	Cyclohexane (259°C), Kerosene (210°C)
T4: 135°C	Di-ethyl Ether (160°C)
T5: 100°C	-
T6: 85°C	Carbon Disulphate (95°C)



**View  
ATEX  
Fans**

**Axair Fans UK Limited**

01782 349 430 | www.axair-fans.co.uk

**AXAIR**  
FANS UK LIMITED